



BLOOM JK

Recessed Mounted 60x60cm 25W LED Luminaire



Product Code : BLM 025T 40OP00 4K5606020

Product Data

Standard Features

Housing	: 0,50mm Recessed mounted RAL9003 : Powder finished sheet steel
Diffuser	: Opal PMMA
Ceiling Type	: Rock-wool
IP Grade	: IP 20
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 25.2W
Final Luminous Flux	: 2750 lm
Efficacy	: 110 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Drive Current	: 700mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Glare Rating (UGR*)	: <19

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: 50.000 hours @ Ta=25 °C

Photometric Curve

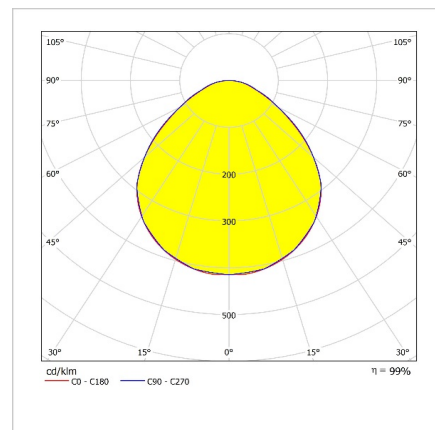

Optional Features


Ceiling Types	: Plasterboard, Clip-in, Lay-in, : Surface-mounted, Acoustic
Correlated Color Temperatures	: 3000K, 6500K
IP Class	: IP 65
Emergency Kit Options	: 1,3 hours
DALI Option	: Yes
KAM Option	: Yes
Color Option	: RAL 9005, 9010

* UGR Value changeable according to design of project

BLOOM JK


Recessed Mounted 60x60cm 25W LED Luminaire

BLM 025T 40OP00 4K5606020

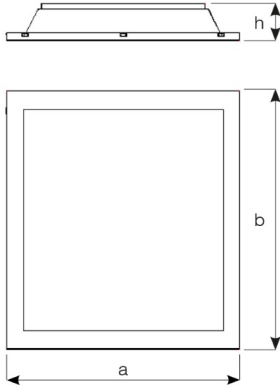

Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	595	595	77	N/A
Plasterboard	595	595	77	575x575
Clip-in	600	600	77	N/A
Lay-in	600	600	77	N/A
Acoustic	585	585	73	N/A
Surface-mounted	595	595	77	N/A

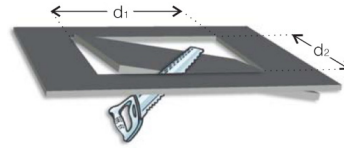

Weight (kg)

Standard	4,5
With Emergency Kit (1 hr.)	5
With Emergency Kit (3 hrs.)	5,5

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 26.01.2016